

Area of Application

ESSVE Construction screw, A-thread with bonded washer designed for installing the sheet-metal on wood.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. Fitted with hex head.

Specification


Material	Hardened steel SAE1018
Surface treatment	Bright zinc plated 12 µm
Washer	Galvanised steel washer, Ø 14 mm with vulcanised EPDM rubber
Corrosion categories	C1

Hole recommendations


When installing in steel a pilot hole should be drilled in the material with Ø 4.1 mm for 6.5 mm screws.

Installation

Recommended rpm: 1800-2500/min

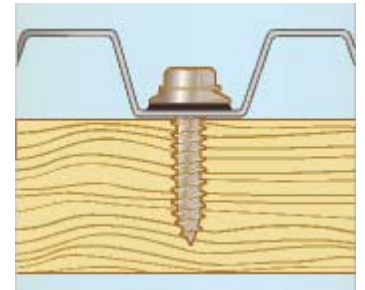

Construction screw with bonded washer, bright zinc plated ESSBOX

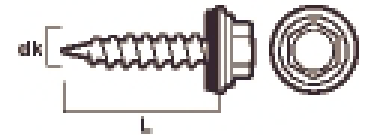

Item no.	Dimension dk x L mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63036	6,5 x 38	8	304	200	4
63037	6,5 x 51	8	304	150	4
63038	6,5 x 64	8	304	100	4
63039	6,5 x 75	8	304	100	4