

Area of Application

ESSVE Roofing screw with wings is designed for the installation of PVC-roofing against wood.


washer with EPDM seal, and is self drilling and tapping. The roofing screw is equipped with wings to facilitate the installation of PVC roofing and ensure that no cracks occur around the washer in cold and hot weather conditions.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment and is polyester powder coated. Fitted with hex head. The screw has a galvanized steel

Installation


You must ensure the screw is not overtightened during installation to prevent damage to bonded washer. Recommended rpm: 1800-2500/min

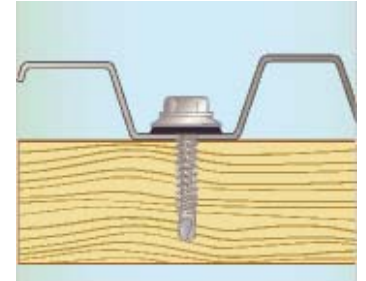

Specification

Material	Hardened steel SAE C1018
Surface treatment	Bright zinc plated min. 10 µm painted 40-50 µm polyester powder coating
Washer	Galvanised steel washer, Ø 14 mm with vulcanised EPDM rubber
Usage	Approx. 8/m ²
Corrosion category	C3

Roofing screw for PVC roofs, bright zinc plated ESSBOX



Item no.	Dimension dk x L mm	Colour	Drill capacity mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63238	4.8 x 35	Silver RAL 9006	4 x 0.7	8	304	250	4

Small package

Item no.	Dimension dk x L mm	Colour	Drill capacity mm	Key width mm	Qty/pack.	Pack./large pack.
513300	4.8 x 35	Silver RAL 9006	4 x 0.7	8	50	6