

Area of Application

ESSVE Roofing screw, aluminium, designed for the installation of profiled sheet-metal against wood.


Description

The screw is produced in aluminium and is polyester powder coated. It has an hex head.

The screw has an aluminium washer with EPDM seal, and is self drilling and tapping.

Installation


You must ensure the screw is not overtightened during installation to prevent damage to bonded washer. Recommended rpm: 1800-2500/min

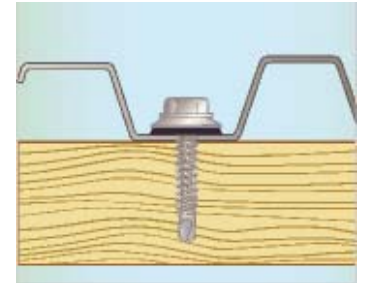

Specification

	Aluminium	Aluminium/painted
Material	Aluminium	Aluminium
Surface treatment	Aluminium	Aluminium and painted 40-50 µm polyester powder coating
Washer	Aluminium washer, Ø 14 mm with vulcanized EPDM rubber	Aluminium washer, Ø 14 mm with vulcanized EPDM rubber
Usage	Approx. 8/m ²	Approx. 8/m ²
Corrosion category	C3	C3

Roofing screw for profiled roofing/façades, aluminium ESSBOX

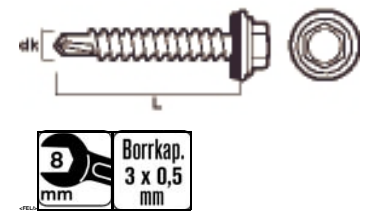

Item no.	Dimension dk x L mm	Colour	Colour code	Drill capacity mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63248	5.5 x 20	Black	RAL 9011	3 x 0.5	8	204	250	6
63251	5.5 x 20	White	RAL9010	3 x 0.5	8	204	250	6
63234	5.5 x 38	Black	RAL9011	3 x 0.5	8	304	250	4