

## Area of Application

ESSVE Self-drilling screw with bonded washer designed for installing the sheet-metal on beams, sheet-metal on light beams, etc., indoors/outdoors.

## Description

The screw is produced in hardened carbon steel with bright zinc plated or C4 class Silver CorrSeal surface treatment. Fitted with hex


## Specification

head.

The screw has a bonded washer with EPDM rubber. The screw is self drilling and tapping.

## Installation

A screwdriver with adjustable depth stop should be used for quick and efficient installation. Recommended rpm: 1200-2200/min.

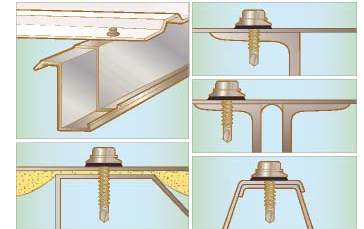

## CorrSeal

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

	Bright zinc plated	CorrSeal
Material	Hardened steel SAE1022	Hardened steel SAE1022
Surface treatment	Bright zinc plated 12 µm	Silver CorrSeal
Washer	Galvanised steel washer, Ø 14 mm with vulcanised EPDM rubber	Stainless A2 washer, dim. 4.8-5.5 Ø 14 mm. 6.3 mm Ø 16 mm vulcanized EPDM
Corrosion categories	C1	C4

## Self-drilling screw with bonded washer, bright zinc plated

### ESSBOX

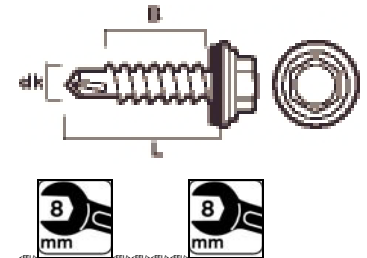

Item no.	Dimension dk × L mm	Drill capacity mm	B = Max grip length mm	Key width mm	ESSBOX size	Qty/pack.	Pack./ large pack.
63520	4,8 × 19	1,5-3,5	10,0	8	204	250	6
63525	5,5 × 25	1,5-5,0	15,0	8	204	250	6
63526	5,5 × 32	3,0-10,0	15,0	8	304	200	4
63524	5,5 × 32	3,0-12,0	9,0	8	304	200	4
63532	5,5 × 38	3,0-12,0	23,0	8	304	200	4
63527	5,5 × 38	1,5-5,0	29,0	8	304	200	4
63530	5,5 × 50	1,5-5,0	41,0	8	304	150	4
63531	5,5 × 75	1,5-5,0	66,0	8	304	100	4
63528	6,3 × 25	1,5-6,0	15,0	8	304	250	4