

Area of Application


ESSVE Marutex self-drilling screw designed for roof and façade applications, i.e. installation of sheet-metal on beams, sheet-metal on light beams, and sheet-against-sheet (overlap).

Description

The screw is made of Marutex stainless steel and is equipped with hex head. The screw is self drilling and tapping.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation. Recommended rpm: 1800-2500/min

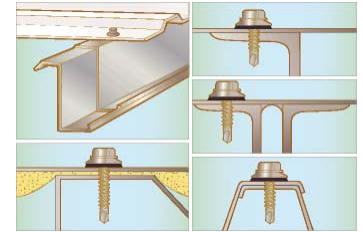


Specification

	Marutex stainless steel
Material	Marutex stainless steel, wax.
Surface treatment	-
Washer	Stainless steel washer A2, Ø 14 mm with vulcanised EPDM rubber
Corrosion category	C4

Marutex self-drilling screw, stainless steel

ESSBOX

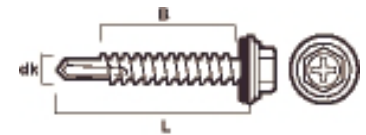

Item no.	Dimension dk x L mm	Drill capacity mm	B = Max. grip length mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63725	4.8 x 19	1.5-4.0	11.0	8	203	250	8
63727	5.5 x 20	1.5-4.0	11.0	8	204	250	6
63729	5.5 x 22	3.0-6.0	12.0	8	204	250	6
63731	5.5 x 40	1.5-4.0	33.0	8	304	200	4
63735	5.5 x 32	3.0-15.0	16.0	8	204	200	6
63737	5.5 x 45	3.0-15.0	26.0	8	304	200	4