

### Area of Application

ESSVE Roofing screw designed for installation profiled plates against wood and sheet-against-sheet (overlap).


Also available in stainless steel with stainless steel washer with EPDM seal. Fitted with hex head.

### Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment and polyester powder coated. Galvanized steel washer with EPDM seal.

### Installation

You must ensure the screw is not overtightened during installation to prevent damage to sealing washer. Recommended speed: 1800-2500/min

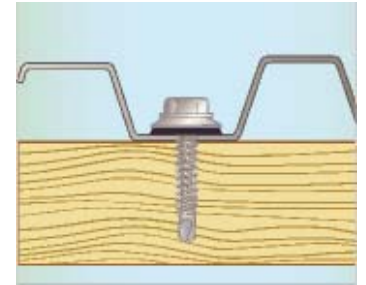

### Specification

	Bright zinc plated	Bright zinc plated/Painted	Stainless steel
Material	Hardened steel SAE1018	Hardened steel SAE1018	Marutex stainless steel
Surface treatment	Bright zinc plated 10 µm	Bright zinc plated and painted 40-50 µm polyester powder coating	
Washer	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Stainless steel washer A2, Ø 14 mm with vulcanised EPDM rubber
Usage	Approx. 8/m <sup>2</sup>	Approx. 8/m <sup>2</sup>	Approx. 8/m <sup>2</sup>
Corrosion categories	C3	C3	C4

## Marutex Roofing screw, stainless steel

### ESSBOX



Item no.	Dimension dk × L mm	Drill capacity mm	Key width mm	ESSBOX size	Qty/pack.	Pack./ large pack.
<b>63739</b>	4,8 × 19	3×0,5	8	204	250	6
<b>63723</b>	4,8 × 35	3×0,5	8	304	250	4