

Area of Application

ESSVE Self-drilling screw with bonded washer designed for installing the sheet-metal on beams, sheet-metal on light beams, etc., indoors/outdoors.

Description

The screw is produced in hardened carbon steel with bright zinc plated or C4 class Silver CorrSeal surface treatment. Fitted with hex


Specification

head.

The screw has a bonded washer with EPDM rubber. The screw is self drilling and tapping.

Installation

A screwdriver with adjustable depth stop should be used for quick and efficient installation. Recommended rpm: 1200-2200/min.

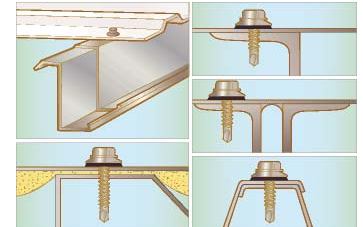

CorrSeal

ESSVE CorrSeal surface treatment.



Type approved by SITAC No. 0075/05

	Bright zinc plated	CorrSeal
Material	Hardened steel SAE1022	Hardened steel SAE1022
Surface treatment	Bright zinc plated 12 µm	Silver CorrSeal
Washer	Galvanised steel washer, Ø 14 mm with vulcanised EPDM rubber	Stainless A2 washer, dim. 4.8-5.5 Ø 14 mm. 6.3 mm Ø 16 mm vulcanized EPDM
Corrosion categories	C1	C4

Self-drilling screw with bonded washer, CorrSeal

ESSBOX



Item no.	Dimension dk x L	Drill capacity mm	B = Max grip length mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63820	4,8 x 19	1,5-3,5	8,0	8	204	250	6
63833	5,5 x 25	1,5-6,0	13,0	8	304	200	4
63835	5,5 x 32	3,0-12,0	13,0	8	304	200	4
63534	6,3 x 38	6,0-16,0	14,0	8	304	200	4
63536	6,3 x 50	6,0-16,0	26,0	8	304	200	4
63538	6,3 x 65	6,0-16,0	41,0	8	304	100	4
63540	6,3 x 90	6,0-16,0	66,0	8	304	100	4