

Area of Application

ESSVE Self-drilling screw without bonded washer designed for installing the sheet-metal on beams, sheet-metal on light beams, etc., indoors/outdoors.

Description

The screw is produced in hardened carbon steel with bright zinc plated or C4 class Silver


Specification

CorrSeal surface treatment. It is equipped with hex head.

The screw is self drilling and tapping.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation. Recommended rpm: 1200-2200/min.

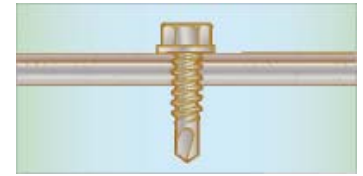

CorrSeal

ESSVE CorrSeal surface treatment.



Type approved by SITAC No. 0075/05

	Bright zinc plated	CorrSeal
Material	SAE1022	SAE1022
Surface treatment	Bright zinc plated 12 µm	Silver CorrSeal
Corrosion categories	C1	C4

Self-drilling screw without bonded washer, CorrSeal

ESSBOX

Item no.	Dimension dk x L mm	Drill capacity mm	B = Max. grip length mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63920	4.8 x 19	1.5-3.0	13.5	8	202	250	12
63925	5.5 x 25	1.5-5.0	18.5	8	203	250	8
63932	5.5 x 32	1.5-5.0	25.5	8	203	200	8
63938	5.5 x 38	1.5-5.0	31.5	8	204	200	6
63950	5.5 x 50	1.5-5.0	43.5	8	204	150	6
63928	6.3 x 25	1.5-6.0	17.0	8	204	250	6
63939	6.3 x 38	1.5-6.0	30.0	8	204	200	6
63951	6.3 x 50	1.5-6.0	42.0	8	204	150	6

