

### Area of Application

ESSVE Roofing screw with sharp point designed for the installation of profiled sheet-metal against wood.

Max. sheet-metal thickness 3×0.5 mm


### Description

A self drilling and tapping screw with sharp point. ESSVE Roofing screw delivered in a bright zinc plated design, bright zinc plated

with galvanised steel washer with EPDM seal and polyester powder coated or stainless steel.

### Installation

Appropriate speed for installation is approx. 1800-2500/min. You must ensure the screw is not overtightened during installation to prevent damage to bonded washer.

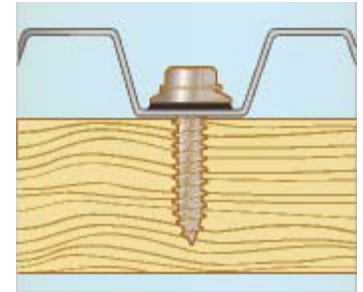


### Specification

	Bright zinc plated	Bright zinc plated/painted	Stainless steel
Material	Hardened steel SAE C1018	Hardened steel SAE C1018	Stainless steel A2/ Stainless steel/painted
Surface treatment	Bright zinc plated 5 µm	Bright zinc plated min. 5 µm and painted 50-60 µm polyester powder coating	-
Washer	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Stainless steel Ø 14 mm with vulcanized EPDM rubber
Usage	Approx. 8/m <sup>2</sup>	Approx. 8/m <sup>2</sup>	Approx. 8/m <sup>2</sup>
Corrosion category	C1	C3	C4

## Roofing screw with sharp point, bright zinc plated

### ESSBOX

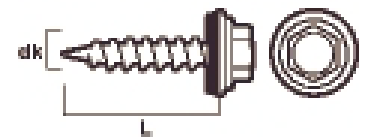

Item no.	Dimension dk x L mm	Drill capacity mm	Key width mm	ESSBOX size	Qty/ pack.	Pack./ large pack.
64201	4.8 × 25	3 × 0.5	8	204	250	6
64301	4.8 × 38	3 × 0.5	8	304	250	4
64402	4.8 × 50	3 × 0.5	8	304	200	4
64502	4.8 × 63	3 × 0.5	8	304	150	4
64601	4.8 × 75	3 × 0.5	8			