

Area of Application

ESSVE Roofing screw with sharp point designed for the installation of profiled sheet-metal against wood.

Max. sheet-metal thickness 3×0.5 mm


Description

A self drilling and tapping screw with sharp point. ESSVE Roofing screw delivered in a bright zinc plated design, bright zinc plated

with galvanised steel washer with EPDM seal and polyester powder coated or stainless steel.

Installation

Appropriate speed for installation is approx. 1800-2500/min. You must ensure the screw is not overtightened during installation to prevent damage to bonded washer.

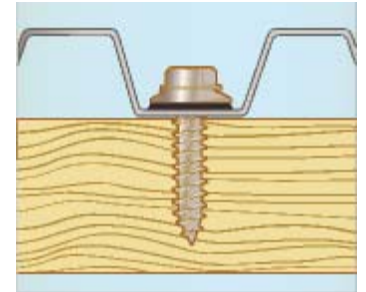

Specification

	Bright zinc plated	Bright zinc plated/painted	Stainless steel
Material	Hardened steel SAE C1018	Hardened steel SAE C1018	Stainless steel A2/ Stainless steel/painted
Surface treatment	Bright zinc plated 5 µm	Bright zinc plated min. 5 µm and painted 50-60 µm polyester powder coating	-
Washer	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Steel washer, Ø 14 mm with vulcanised EPDM rubber	Stainless steel Ø 14 mm with vulcanized EPDM rubber
Usage	Approx. 8/m ²	Approx. 8/m ²	Approx. 8/m ²
Corrosion category	C1	C3	C4

Roofing screw with sharp point, painted in RR colours

ESSBOX

FIELD FIELD FIELD

Item no.	Dimension dk x L mm	Drill capacity mm	Colour	Co lou r co de	Key wid th mm	ESSBOX size	P a c k / Q t y / l a r g e p a c k .
64203	4.8 × 25	3 × 0.5	Dark green	RR 11	8	204	2 6 5 0
64205	4.8 × 25	3 × 0.5	White	RR 20	8	204	2 6 5 0
64207	4.8 × 25	3 × 0.5	Light grey	RR 21	8	204	2 6 5 0
64209	4.8 × 25	3 × 0.5	Grey	RR 22	8	204	2 6 5 0
64211	4.8 × 25	3 × 0.5	Dark grey	RR 23	8	204	2 6 5 0
64213	4.8 × 25	3 × 0.5	Light yellow	RR 24	8		
64221	4.8 × 25	3 × 0.5	Dark red	RR 28	8		
64223	4.8 × 25	3 × 0.5	Rust red	RR 29	8	204	2 6 5 0
64229	4.8 × 25	3 × 0.5	Dark brown	RR 32	8	204	2 6 5 0
64231	4.8 × 25	3 × 0.5	Black	RR 33	8	204	2 6 5 0
64233	4.8 × 25	3 × 0.5	Light Blue	RR 34	8	204	2 6 5 0
64241	4.8 × 25	3 × 0.5	Silver	RR 40	8	204	2 6 5 0
64243	4.8 × 25	3 × 0.5	Dark silver	RR 41	8	204	2 6 5 0
64245	4.8 × 25	3 × 0.5	Brick red	RR 75 0	8	204	2 6 5 0
64305	4.8 × 38	3 × 0.5	White	RR 20	8	304	2 4 5 0
64311	4.8 × 38	3 × 0.5	Dark grey	RR 23	8	304	2 4 5 0
64319	4.8 × 38	3 × 0.5	Dark brown	RR 32	8	304	2 4 5 0

Item no.	Dimension dk x L mm	Drill capacity mm	Colour	Co lou r co de	Key wid th mm	ESSBOX size	P a c k. / Q t y / p a c k. .
64321	4.8 x 38	3 x 0.5	Black	RR 8 33		304	2 4 5 0
64404	4.8 x 50	3 x 0.5	Dark green	RR 8 11		304	2 4 0 0
64406	4.8 x 50	3 x 0.5	White	RR 8 20		304	2 4 0 0
64408	4.8 x 50	3 x 0.5	Dark grey	RR 8 23		304	2 4 0 0
64412	4.8 x 50	3 x 0.5	Rust red	RR 8 29		304	2 4 0 0
64414	4.8 x 50	3 x 0.5	Dark brown	RR 8 32		304	2 4 0 0
64416	4.8 x 50	3 x 0.5	Black	RR 8 33		304	2 4 0 0
64422	4.8 x 50	3 x 0.5	Brick red	RR 8 75 0			
64504	4.8 x 63	3 x 0.5	Dark brown	RR 8 32		304	1 4 5 0
64506	4.8 x 63	3 x 0.5	Black	RR 8 33		304	1 4 5 0
64508	4.8 x 63	3 x 0.5	Dark grey	RR 8 23		304	1 4 5 0
64510	4.8 x 63	3 x 0.5	Rust red	RR 8 29		304	1 4 5 0
64603	4.8 x 75	3 x 0.5	Dark brown	RR 8 32			
64605	4.8 x 75	3 x 0.5	Black	RR 8 33		304	1 4 0 0