

Area of application

ESSVE Ridge tie is designed for use on roof ridge structures and for installing cross-laid framework.

Normally used as right and left-hand ties at the same time for a strong anchoring of ridges.


Description

Made of 1.5 or 2.0 mm hot dip galvanized sheet steel and fitted with 5 mm holes. Ridge

tie available as Universal or in right and left-hand designs.

Installation

The connectors are installed with e.g. ESSVE Anchor nails 4.0 mm or ESSVE Wood connector screws 5.0 mm. Must be fitted with 2 connectors per cross-joint, diagonally/symmetrically towards each other.

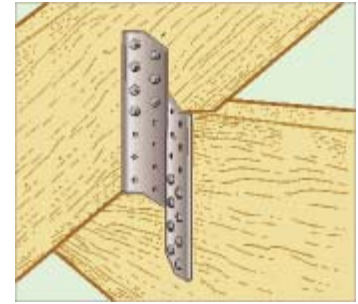


Specification

Material	Steel S250GD
Lower yield point, fyk	Min. 250 MPa
Surface treatment	Hot dip galvanized 20 µm
Corrosion category	C2
Nail hole Ø	5.0 mm

Ridge tie left/right, hot dip galvanized

Left/right

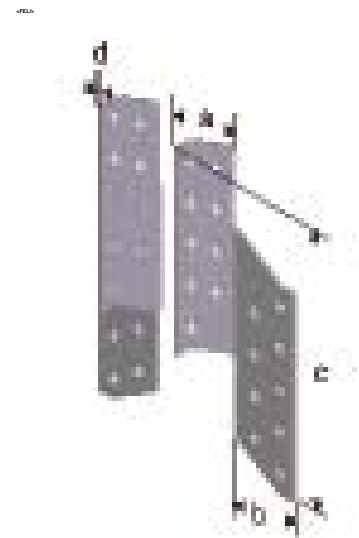

Item no.	Dimensions a x b x c x d mm	Hole Anchor nail/ Wood connector screw Quantity/flange x Ø 5 mm	CE marked	Qty/ pack.	Quantity / Item pallet code
451239	32x32x170x1.5 PL	9+9	CE	50	1600 D
451242	32x32x170x1.5 PL	9+9	CE	50	1600 D
451245	32x32x210x1.5 PL	13+13	CE	50	1600 L
451248	32x32x210x2.0 PL	13+13	CE	50	1600 L
451251	32x32x250x1.5 PL	17+17	CE	50	1600 L
451254	32x32x250x1.5 PL	17+17	CE	50	1600 L
451257	32x32x290x1.5 PL	21+21	CE	50	1600 L
451260	32x32x290x1.5 PL	21+21	CE	50	1600 L
451263	32x32x330x1.5 PL	25+25	CE	50	1600 L
451266	32x32x330x1.5 PL	25+25	CE	50	1600 L
451268	32x32x370x2.0	29+29	CE		
451271	32x32x370x2.0	29+29	CE		

L = In stock, D = Direct delivery, 4 week delivery time.