

## Area of application


ESSVE Fixing band is designed for anchoring/bracing and installation of diverse structures and parts. Dimensions 20x1.0 and 20x1.5 used for basic structures and dimensions 25x2.0 when larger load requirements are to be met.

## Description

Made of hot dip galvanized sheet steel and fitted with 4.0 and 5.0 mm holes for nails/screws and 6.5 mm holes.

## Installation




The band is installed using e.g. ESSVE Anchor nails 4.0 mm or ESSVE Wood connector screws 5.0 mm. The band must be tightened fully during installation, to reach maximum stability.

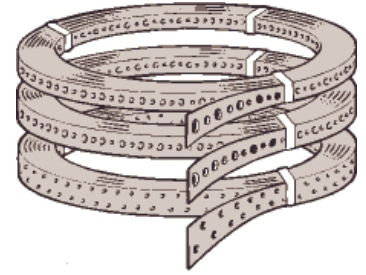

## Specification

Material	Steel S250GD
Lower yield point, fyk	Min. 250 MPa
Surface treatment	Hot dip galvanized 20 µm
Corrosion category	C2
Nail hole	4.0/6.5 mm and 5.0 mm
Length/pack.	25 m

## Fixing band

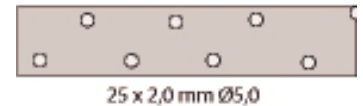

Item no.	Dimensions mm	Hole Ø mm	Length/pack. m	Practical load capacity for the band* kN	CE marked	Qty/pack.	Quantity / pallet	Item code
451487	20x1.0	4.0/6.5	25	2.6	CE	1	120	L
451490	20x1.5	4.0/6.5	25	4.0	CE	1	120	L
451493	25x2.0	5.0	25	7.8	CE	1	60	L

\* Check the number of nails required.