

Area of application

ESSVE Angle brackets V10 to P8 are designed for anchoring, among others, framework to concrete, lightweight concrete or masonry.


Description

Made of hot dip galvanized sheet steel and fitted with 5.0 mm holes and bolt hole, see table

below.

Installation


Angle brackets P3 to P8 are installed with e.g. ESSVE Anchor nails 4.0 mm or ESSVE Wood connector screws 5.0 mm or with an appropriate bolt.

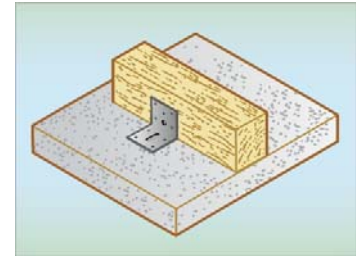

Specification

Material	Steel S250GD
Lower yield point, fyk	Min. 250 MPa
Surface treatment	Hot dip galvanized 20 µm
Corrosion category	C2
Nail hole Ø	5.0 mm
Bolt hole Ø	10. 11 or 13 mm

Angle bracket V21, hot dip galvanized

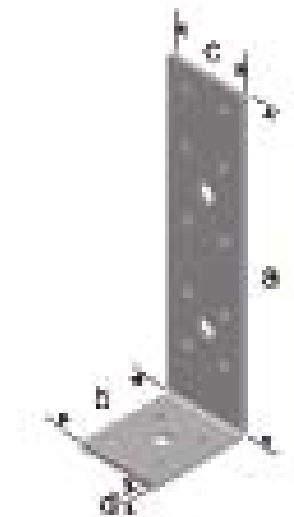

V21



Item no.	Type	Dimensions a x b x c x d mm	Hole Anchor nail/Wood con- nector screw Quantity x Ø 5 mm	Hole Bolt Quantity x Ø 13 mm	CE marked	Expander Ø mm	Qty/ pack.	Quanti- ty / pallet	Item code
451543	V21	160x50x40x3. 0	14	3	CE	10	70	4480	L