

Specification

	CorrSeal	Stainless steel
Material	Hardened steel SAE 1022	Stainless steel A2
Surface treatment	CorrSeal, wax	Wax
Usage	Approx 35 per m ²	Approx 35 per m ²
Corrosion category	C4	C4
Ultimate tensile strength value, f_{uk}	-	Min. 500 MPa
Yield point value, f_{yk}	-	Min. 250-300 MPa



Decking screw Torpedo Max III for wooden joists CorrSeal

Area of Application

ESSVE Decking screw Torpedo MAX III intended for the installation of fencing, decking timber, etc against wooden joists. Decking screws of stainless steel grade are always recommended for very harsh environment such as marine environments, pool areas, etc. The screw has a larger diameter compared to our standard decking screws, in order to handle applications with higher demands, such as a decking, that are exposed to the large movements than what is considered normal.

NOTE! Decking screws of stainless steel grade and pre-drilling are always recommended when installing teak-like decking timber such as Cumaru, Kirai and others as well as Siberi-

an larch.

Description

The screw is produced in hardened carbon steel with CorrSeal surface treatment or of stainless steel A2. It is equipped with Ph2 drive/bits. New unique patented helical triple thread at the point which gives an extremely fast frequency during start - "Instant grip", the new helical triple thread also provides a very low drive-in torque in harder materials and minimizes splitting. The head is equipped with 4 patented Tornado grooves that countersinks the screw, leaving a smooth surface without splinters.

Installation


Recommended rpm: 1 100-2200/min.

CorrSeal

ESSVE CorrSeal surface treatment.



Type approved by SITAC No. 0075/05

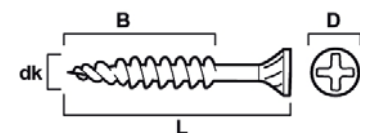

Package

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty./ pack.	Pack./ large pack.
505442	4,2 x 42	7,4	27,0	PH2	1000	6
505455	4,5 x 55	7,4	27,0	PH2	1000	6
505475	4,5 x 75	7,4	35,0	PH2	1000	4