

Area of Application

ESSVE drywall screw are designed for the application of plasterboards indoors against wooden joists.

Description

The screw is produced by hardened carbon steel with bright zinc plated surface. It is equipped with Philips crosshead Ph2.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation.

Recommended rpm:

25-55 mm 2800-6000/min

56-75 mm 2000-2800/min




Specification

	Bright zinc plated
Material	Hardened carbon steel SAE C1018
Surface treatment	Bright zinc plated 5 µm
Usage	Approx 20 per m ²
Corrosion categories	C1

Drywall screw for wooden joists, bright zinc plated

ESSBOX

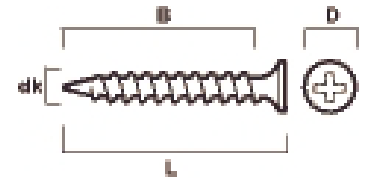

Item. no	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/pack.	pack./large pack.
532630	3,9 x 30	8,4	25,0	PH2	202	250	12
532641	3,9 x 41	8,4	36,0	PH2	203	250	8
532656	3,9 x 57	8,4	38,0	PH2	203	200	8
532130	3,9 x 30	8,4	25,0	PH2	304	1000	4
532142	3,9 x 41	8,4	36,0	PH2	304	900	4
532146	3,9 x 45	8,4	40,0	PH2	304	800	4
532151	3,9 x 51	8,4	34,0	PH2	304	500	4
532156	3,9 x 57	8,4	38,0	PH2	304	500	4
532175	4,5 x 75	8,4	50,0	PH2	204	200	6

Plastic bucket

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/pack.
532231	3.9 x 30	8.4	25.0	PH2	2700
532242	3.9 x 41	8.4	36.0	PH2	1700

Small package

Item. no	Dimension dk x L mm	D mm	B mm	Bit no	Qty/pack.	pack./large pack.
513250	3,9 x 30	8,4	25,0	PH2	100	6
513252	3,9 x 41	8,4	35,0	PH2	100	6
513254	3,9 x 57	8,4	50,0	PH2	100	6