

Area of Application

ESSVE Laminate/Panel screw is specially designed for indoor installation of wall and ceiling panels.

The screw has a Hi-Lo thread and can be used on wooden or steel substrate. Drill capacity 0.4 – 0.9 mm.

Hardened steel with bright zinc plated surface treatment. It is equipped with 1 fibre cut at the point. Equipped with crosshead Ph2.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment.

Specification

Material	Hardened steel SAE C1022
Surface treatment	Bright zinc plated
Environment/Corrosivity category	C1

It is equipped with fibre cut at the point to reduce cracking and minimise the drive-in torque.

The shape of the screw head has a low height and countersinks easily into the substrate.


It is equipped with Philips crosshead Ph2.

Installation

Recommended rpm: 400-1200/min.



Laminate/Panel screw, bright zinc plated ESSBOX

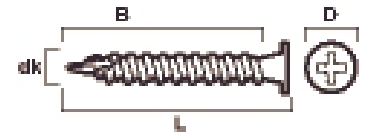

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/ pack.	Pack./ large pack.
537631	3.9 x 30	8.0	25.0	PH2	203	250	8
537641	3.9 x 40	8.0	35.0	PH2	203	250	8