

Area of Application

ESSVE Roofing screw with drillpoint intended for installing in roof insulation against wood or steel joists, max 2x1.25 mm. Alternative acoustic panels installed against profiled sheet-metal, aluminium or wood.

Description

The screw is made of case hardened carbon steel and has a Silver Sentri surface treatment. Fitted with bit type TX25 and with a countersunk head.




Installation

Recommended rpm: 1800-2500/min

Specification

Material	Case hardened carbon steel SS 1370
Surface treatment	SILVER Ruspert 1000 hr
Corrosion category	C3

Roofing screw with drillpoint, SILVER Ruspert 1000 hr

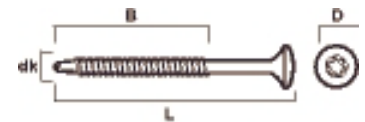

Item no.	Dimension dk x L mm	Drill capacity mm	D mm	B mm	Bit no	Qty/pack.
545405	4.8 x 50	2 x 1.25	9.0	45.0	TX25	1000
545406	4.8 x 60	2 x 1.25	9.0	50.0	TX25	500
545407	4.8 x 70	2 x 1.25	9.0	60.0	TX25	500
545408	4.8 x 80	2 x 1.25	9.0	70.0	TX25	500
545409	4.8 x 90	2 x 1.25	9.0	80.0	TX25	500
545410	4.8 x 110	2 x 1.25	9.0	80.0	TX25	500
545414	4.8 x 130	2 x 1.25	9.0	80.0	TX25	400
545416	4.8 x 150	2 x 1.25	9.0	80.0	TX25	350