

Area of Application

ESSVE Hobau screws are intended for the installation of against particle-, panel-, plywood- or flooring grade chipboard indoors against wooden joists.

Description

The screw is produced in hardened carbon steel with yellow chromate surface treatment. Fitted with TX drive.

The head is equipped with 4 cutting grooves

that countersinks the screw, leaving a smooth surface without splinters.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation.


Recommended rpm: 35-75 mm 2000-2800/ min



Specification

Material	Hardened steel SAE C1018
Surface treatment	Yellow chromate 5 µm
Corrosion categories	C1

Hobau board screw, for wooden joists, yellow chromate ESSBOX

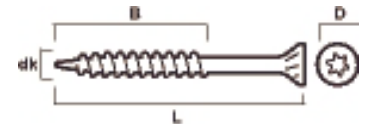

Item no.	Dimension dk x L mm	D mm	B mm	Bits no	ESSBOX size	Qty/ pack.	Pack./ large pack.
552435	4,2 x 35	7,4	23,0	TX15	304	1000	4
552442	4,2 x 41	7,4	27,0	TX15	304	800	4
552446	4,2 x 45	7,4	30,0	TX15	304	700	4
552452	4,2 x 51	7,4	34,0	TX15	304	600	4
552458	4,8 x 57	7,4	38,0	TX20	304	400	4
552466	4,8 x 65	7,4	43,0	TX20	304	350	4
552476	4,8 x 75	7,4	50,0	TX20	304	250	4