

### Area of Application

ESSVE Chipboard screw is designed for chipboard, boards or plywood panels as well as mouldings and base boards indoors against steel joists. Drill capacity 0.4 – 0.9 mm.

### Description

The screw is produced in hardened carbon steel with yellow chromate surface treatment. Fitted with Philips crosshead Ph2.

### Specification

Material	Hardened steel SAE C1018
Surface treatment	Yellow chromate 5 µm
Usage	Approx 20 per m <sup>2</sup>
Corrosion categories	C1


The head is equipped with 4 cutting grooves that countersinks the screw, leaving a smooth surface without splinters.

### Installation

A screwdriver with a depth stop should be used for quick and efficient installation. Recommended rpm: 28-55 mm 2000-2800/min



## Chipboard screw for steel joists. Yellow chromate ESSBOX

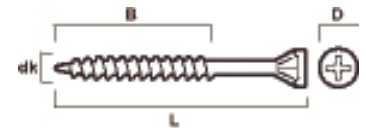

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/ pack.	Pack./ large pack.
553129	3.9 x 28	7.2	23.0	PH2	304	1000	4
553143	3.9 x 42	7.2	30.0	PH2	304	900	4
553155	3.9 x 55	7.2	40.0	PH2	304	500	4