

Area of Application

ESSVEMoulding/base and floor screw designed for the installation of mouldings base boards and solid pine floors indoors, against wood or steel joists. Drill capacity 0.4 – 0.9 mm.

For installation of harder wooden floors e.g. oak pre-drilling is necessary.

Description

The screw is produced in hardened carbon steel with yellow chromate surface treatment and

in yellow chromate or white finish. The screw has a counter-thread under the head to press mouldings base boards and solid pine flooring against the substrate.

The screw is fitted with a fibre cut in the point to reduce cracking and reduce the drive-in torque.

The small head gives a good countersink and the screw is fitted with TX-drive/bits.

Installation

Recommended rpm: 400-1200/min.




Specification

Material	Hardened steel SAE C1022
Surface treatment	Yellow chromate + white finish
Environment/Corrosivity category	C1

Moulding/base/floor screw small head for wooden/steel joists. Yellow chromate, white painted head

ESSBOX

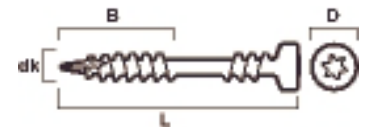

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Colour	Colour code	ESSBOX size	Qty/pack.	Pack./large pack.
555642	3.9 x 42	5.0	27.0	TX10	White	RAL9010	203	400	6
555657	3.9 x 57	5.0	37.0	TX10	White	RAL9010	204	250	6