

Area of Application

ESSVE Self-tapping screw with extended point designed for installation/assembly of sheet metal indoors.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment.


Specification

Material	H a r d e n e d s t e e l S A E 1 0 1 8 (S S 1 3 7 0)
Surface treatment	B r i g h t z i n c p l a t e d 5 μ m
Corrosion categories	C 1

Fitted with hex head, and Phillips crosshead Ph2.


Installation

Recommended rpm during assembly 1800-2500/min.

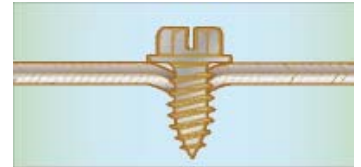

Self-tapping screw for sheet-metal, bright zinc plated

ESSBOX



Item no.	Dimension dk × L mm	Drill capacity mm	Key width mm	ESSBOX size	Qty/ pack.	Pack./ large pack.
562513	4,2 × 9,5	2x0.9	1/4"	203	1000	8
562213	4,2 × 13	2x0.9	1/4"	204	1000	6
562917	4,2 × 19	2x0.9	1/4"	204	1000	6