

Area of Application

ESSVE Wafer head screw with drillpoint designed for the installation of steel joists against steel joists. Drill capacity 2 x 2.0 mm.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. It comes with a Philips crosshead Ph2.

As the screw has an extra low head, 1.0 mm, it is suitable for installing where extremely low inset height of the head is required.

Installation


Recommended rpm:
400-1200/min



Specification

Material	Hardened steel SAE 1022
Surface treatment	Bright zinc plated 5 µm
Corrosion categories	C1

Wafer head screw with drillpoint for steel joists, bright zinc plated ESSBOX

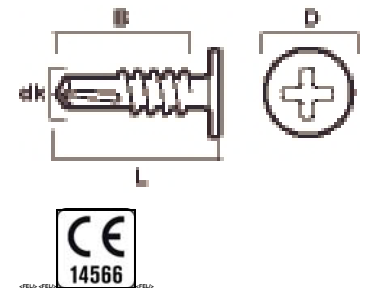

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty./ pack.	Pack./ large pack.
562518	4,8 x 17	8,0	16,0	PH2	202	500	12