

Area of Application

ESSVE Wafer head screw with sharp point is intended for installing in sheet materials indoors against wood or steel joists, max 0.4-0.9 mm.


Description

The screw is manufactured of hardened carbon steel with phosphated or bright zinc plated

ted surface treatment and in different RAL colours. It is equipped with Philips crosshead Ph2.

Installation

Recommended rpm:
400-1200/min

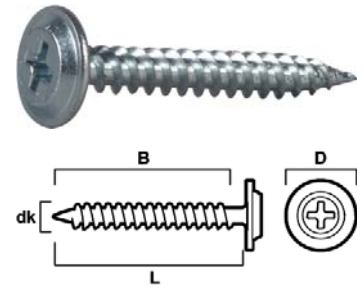

Specification

	Phosphated	Bright zinc plated	Painted	Dacro 500 hr
Material	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022
Surface treatment	Phosphated	Bright zinc plated 5µm	Painted in different colours	Dacro 500 hr
Corrosion categories	C1	C1	C1	C3

Wafer head screw sharp point, for wood/steel joists, phosphated

ESSBOX

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/pack.	Pack./large pack.
571113	4,2 x 13	11,0	13,0	PH2	204	1000	6
571125	4,2 x 25	11,0	25,0	PH2	304	1000	4

