

Area of Application

ESSVE Window sill screw designed for the installation of window sill flashing against wooden frames.

Description

The screw is made of stainless acid steel A2. Available in colours bright, white or black finish. It is equipped with a square drive no. R1.

Installation

When installed the window sill flashing must be pre-drilled.

Recommended rpm: 400-1200/min.




Specification

	Stainless steel	Painted
Material	Stainless steel A2	Stainless steel A2
Surface treatment	-	White or black finish
Corrosion category	C4	C4

Window sill screw, stainless steel

ESSBOX

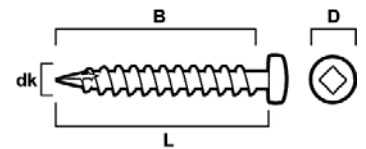

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/ pack.	Pack./ large pack.
590510	3.5 x 25	6.2	25.0	R1 Square	102	200	24
513337	3.5 x 25 (small pack)	6.2	25.0	R1 Square	-	20	10