

Area of Application

ESSVE Sandwich element screw is designed for the installation of sandwich elements against steel.

Description

The screw is equipped with drillpoint and is manufactured of harden steel. ESSVE Sandwich element screw is available in 2 versions, bright zinc plated design with a galvanised steel washer intended for installation indoors and Silver CorrSeal design with stainless A2

washer intended for installation outdoors.

Both models are fitted with EPDM seals and hex heads.

Installation

A screwdriver with an adjustable depth stop is recommended for installation.

Recommended speed:

Drill cap 1.5-6.0mm 1800-2500/min

Drill cap 3.0-12.0mm 1000-1900/min



CorrSeal

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

Specification

	Bright zinc plated	CorrSeal
Material	Hardened steel SAE1022	Hardened steel SAE1022
Surface treatment	Bright zinc plated 12 µm	Silver CorrSeal
Washer	Galvanised steel washer, Ø 19 mm with vulcanised EPDM seal	Stainless A2 washer Ø 19.0 mm washer with vulcanised EPDM seal
Corrosion category	C2	C4

Sandwich element screw, bright zinc plated

Cardboard packaging

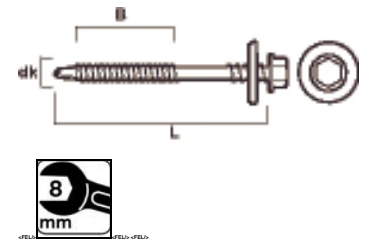

Item no.	Dimension dk x L mm	Drill capacity mm	B mm	Grip length mm	Key width mm	Qty/pack.
10563170	5.5/6.3 x 65	1.5-6.0	30.0	24-47	8	750
10563172	5.5/6.3 x 70	1.5-6.0	30.0	29-52	8	750
10563174	5.5/6.3 x 90	1.5-6.0	30.0	49-72	8	550
10563176	5.5/6.3 x 110	1.5-6.0	72.0	27-92	8	500
10563178	5.5/6.3 x 125	1.5-6.0	72.0	42-107	8	500
10563180	5.5/6.3 x 150	1.5-6.0	72.0	67-132	8	400
10563182	5.5/6.3 x 175	1.5-6.0	72.0	92-157	8	400
10563184	5.5/6.3 x 200	1.5-6.0	72.0	117-182	8	350
10563188	5.5/6.3 x 230	1.5-6.0	72.0	147-212	8	300
10563189	5.5/6.3 x 275	1.5-6.0	72.0	192-257	8	100
10563156	5.5/6.3 x 70	3.0-12.0	30.0	22-39	8	750
10563158	5.5/6.3 x 90	3.0-12.0	30.0	42-59	8	550
10563160	5.5/6.3 x 110	3.0-12.0	72.0	47-93	8	500
10563164	5.5/6.3 x 150	3.0-12.0	72.0	60-119	8	400
10563163	5.5/6.3 x 135	3.0-12.0	72.0	45-104	8	450
10563166	5.5/6.3 x 175	3.0-12.0	72.0	85-144	8	400
10563167	5.5/6.3 x 186	3.0-12.0	72.0	96-155	8	350
10563168	5.5/6.3 x 200	3.0-12.0	72.0	110-169	8	350
10563169	5.5/6.3 x 230	3.0-12.0	72.0	140-199	8	300
10563190	5.5/6.3 x 250	3.0-12.0	72.0	160-219	8	200
10563192	5.5/6.3 x 285	3.0-12.0	72.0	195-254	8	100